



Articulated arm

Measuring stands

DESCRIPTION

Stands with magnetic base for lever indicators


• Imported article

В

- Vertical rod Ø 16 mm and hinged horizontal rod Ø 12 mm •
- Maximum measuring height 350 mm •
- Magnetic base with attraction force 80 kg •
- Clamping diameter 8 mm •

Stands for comparators and probes with ceramic table

- Imported article •
- Vertical chrome steel column Ø 25 mm •
- Clamping diameter 8 mm •
- Maximum measuring height 115 mm .
- Cast iron base with ceramic table 85 x 85 x 25 mm, grade xx

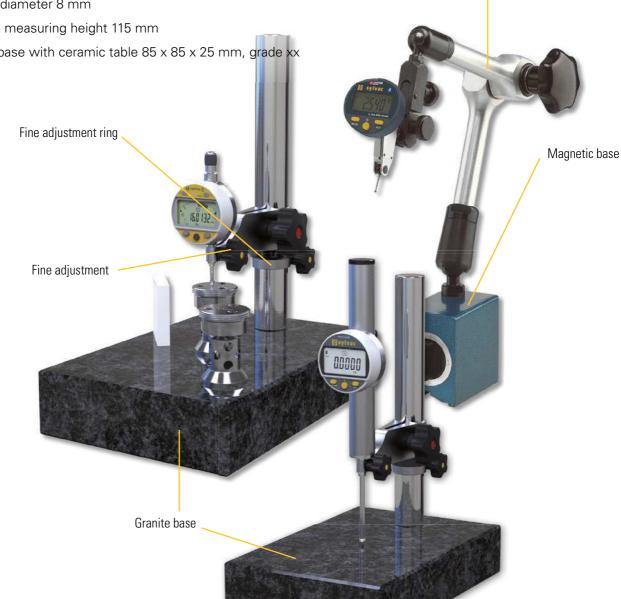



В

Measuring stands


TECHNICAL SPECIFICATIONS



908-1201



808-1204



| | | 908-1201 | 808-1204 | 808-1205 |
|----------------------------|----|------------------------|-----------------|-----------------|
| Base | | magnetic ¹⁾ | granit grade 00 | granit grade 00 |
| Base dimensions AxBxH | mm | 70x46x65 | 300x210x60 | 300x210x60 |
| Central locking | | • | | |
| Column | mm | | Steel Ø 35 | Steel Ø 35 |
| Clamping dimension | mm | Ø 8 | Ø 8 | Ø 25 |
| Dist. Columnmeas. point. C | mm | | 115 | 115 |
| Measuring range | mm | | 0 - 260 | 0 - 260 |
| Total height | mm | 430 | 360 | 360 |
| Weight | kg | 2.2 | 13.4 | 13.5 |
| Fine adjustment | | | • | • |

¹⁾ Gripping coefficient : 600N






Measuring stands

TECHNICAL SPECIFICATIONS

Series 808 stands for digital indicators and probes

- Made at Sylvac in Switzerland
- Superior quality compared to the Asian tables generally found on the market
- Reinforced column Ø 25 or 35 mm with precision measuring arm for excellent parallelism and high rigidity reducing the measuring error generated by the support.
- Clamping diameter 8 mm and 25 mm (for fixing S_Dial PRO dial gauges)
- Ring for fine adjustment of the vertical position
- Grade 00 granite base


В




808-1206



808-1203



808-1202



| | | 808-1206 | 808-1207 | 808-1202 | 808-1203 | 808-1201 |
|----------------------------|----|-----------------|-----------------|-----------------|-----------------|-----------------|
| Base | | granit grade 00 |
| Base dimensions AxBxH | mm | 100X150X40 | 100X150X40 | 240x140x50 | 240x140x50 | 240x140x50 |
| Central locking | | | | | | |
| Column | mm | Steel Ø 25 | Steel Ø 35 | Steel Ø 35 | Steel Ø 35 | Steel Ø 35 |
| Clamping dimension | mm | Ø 8 | Ø 8 | Ø 25 | Ø 8 | Ø 8 |
| Dist. Columnmeas. point. C | mm | 70 | 70 | 115 | 70 | 115 |
| Measuring range | mm | 0 - 190 | 0 - 260 | 0 - 260 | 0 - 260 | 0 - 260 |
| Total height | mm | 270 | 340 | 340 | 340 | 340 |
| Weight | kg | 2.9 | 4.3 | 6.6 | 6.5 | 6.6 |
| Fine adjustment | | • | • | ٠ | ٠ | ٠ |